



Aquacon® Filter Cartridges

AD Series

Eliminate Diesel Fuel Contamination Problems at the Pump


- Positive shut-off prevents pumping harmful amounts of water
- Removes silt and rust
- Effective protection combined with economical life

DESCRIPTION

AD series *Aquacon* cartridges were developed in cooperation with a major oil company for diesel fuel applications. Balancing effective water and dirt removal with economical life, AD cartridges have become standard for most diesel users.

Nominal filtration efficiency is 25 microns. Effluent water levels are typically below 50 parts per million. The AD design retains the water shut-off feature and the high water holding capacity of similar size AC series cartridges.

Motor gasoline, hydraulic and lube oils can also be filtered with AD cartridges. Aviation fuels, however, must be filtered with the more efficient series design.

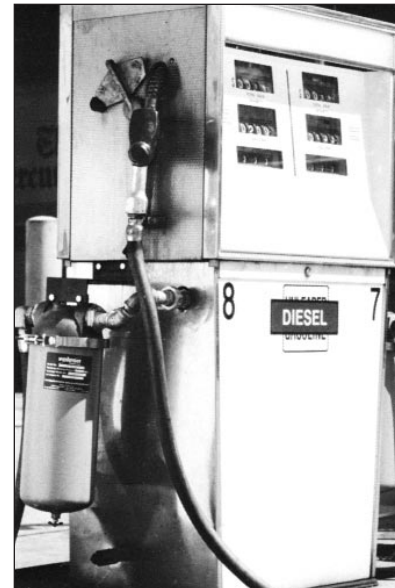

CARTRIDGE INFORMATION:

Model Number	Dimensions (inches)	Max. Diesel Flow Rate per cartridge (GPM)	Use
AD-21025	2 ⁵ / ₈ x 9 ³ / ₄	15	Velcon VF-31E Housing
AD-51225	5 ⁵ / ₈ x 12 ¹ / ₄	50	Velcon VF-61EP ¹ / ₂ Housing
AD-60925	6 x 9 ¹³ / ₁₆	35	Replace Fram/Facet CC-21C
AD-61425	6 x 14 ¹ / ₂	50	Velcon Aviation Housings
AD-71825	6 ¹ / ₄ x 18	60	Velcon Industrial Housings



Velcon products are sold and serviced by a world-wide representative network. To order, contact Headquarters or your **LOCAL REPRESENTATIVE:**

COMPANY HEADQUARTERS:
 Velcon Filters, Inc. 4525 Centennial Blvd.
 Colorado Springs, CO 80919-3350
 Phone: 1.800.531.0180
 Fax: 719.531.5690
 e-mail: vfsales@velcon.com
 www.velcon.com

MANUFACTURING PLANTS LOCATED AT:
 Colorado Springs, Colorado
 Sylacauga, Alabama
 Harlingen, Texas

OVERSEAS AFFILIATES:
 Frankfurt/M., W. Germany & Singapore



**Fluid
 Decontamination
 Specialists**

Due to Velcon Filters' continuing product improvement, drawings, specifications and pictures are subject to change without notice.